

"DUAL-SPOT" SERIES


Recess Ceiling-Mount Type
貓眼龍系列

Features

- Match the ceiling tile 300x600(mm)
- Tungsten Halogen Lamp
- High efficiency
- Durable
- False ceiling-mount
- GMS box with powder coating
- Mirror laminated reflector
- Maintenance free



"CRYSTALITE" Cat. CS-6-10-K2-T

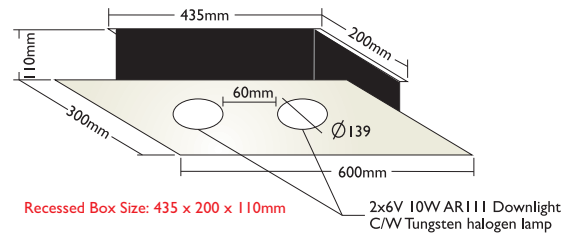

Technical Data

Model	CS-6-10-K2-T
System Mode	Non-Maintained Type
Emergency Output	2x6V 10W Tungsten Halogen Lamps
Battery	Sealed Ni-cd / Ni-mh High Temperature Rechargeable Battery Two sets of 6V 4.0Ah
Discharge Duration	2 Hours
Recharge Period	12 Hours
Line Voltage	A/C 220V~240V 50Hz +6%-10%
Compliance	BS EN 60598-2-22 ; BS 5266, FSD PPA 104A (4 th Revision)

"HALO-LITE H" SERIES


High Lumen Output Series

Feature


A high lumen output emergency lighting unit is designed to meet the requirement of high ceiling level. The 2x12V 20W lamp will provide 600 lumens of brightness.



"CRYSTALITE" Cat. CE-20-HCS

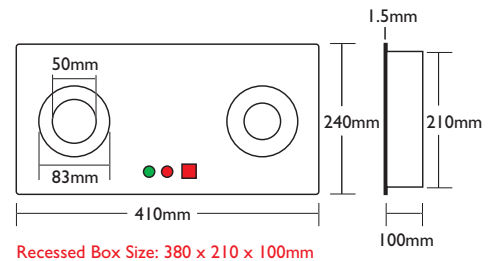

"CRYSTALITE" Cat. CE-20-HWS

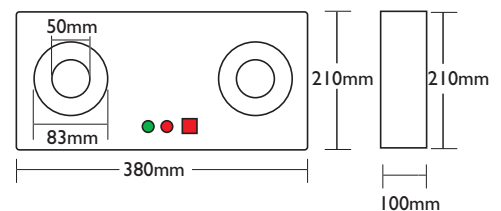

Technical Data

Model	CE-20-HCS	CE-20-HWS
System Mode	Non-Maintained Type	
Mounting	Ceiling-mount	Wall-mount
Emergency Output	2x12V 20W Tungsten Halogen Lamps	
Discharge Duration	2 Hours	
Battery	Sealed Lead-Acid Battery 12V 12Ah	
Recharge Period	12 Hours	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)	