

# “LED QUARTER-ROUND LITE” EXIT SIGN SERIES

## Features

- Classical appearance
- Wall-mount
- Single-face application
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

## Legend


### Exit Sign




### Directional Sign



“CRYSTALITE” Cat. CX-LED-405-P-QL

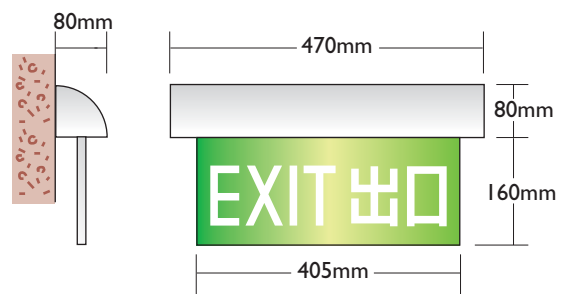

“CRYSTALITE” Cat. CX-LED-570-P-QL

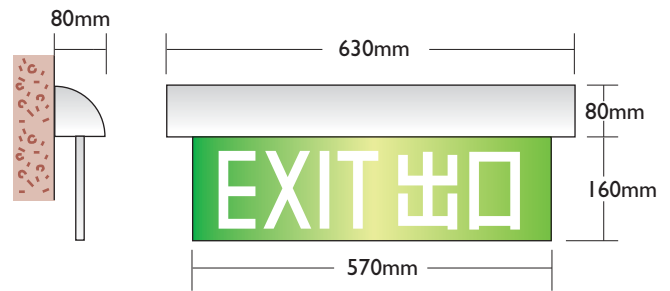

## Technical Data

Model	CX-LED-405-P-QL	CX-LED-570-P-QL
		GMS with white powder coating
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 <sup>th</sup> Revision); FSD Code of Practice Clause 5.10 Exit Sign	

# “LED QUARTER-ROUND LITE SUPREME” EXIT SIGN SERIES

## Features


- Classical appearance
- Wall-mount with stainless steel casing
- Single-face application
- Hairline finishing, mirror finishing or golden plating finishing
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

## Legend

### Exit Sign




### Directional Sign




“CRYSTALITE” Cat. CX-LED-405-P-QL-H

Hairline stainless steel finishing

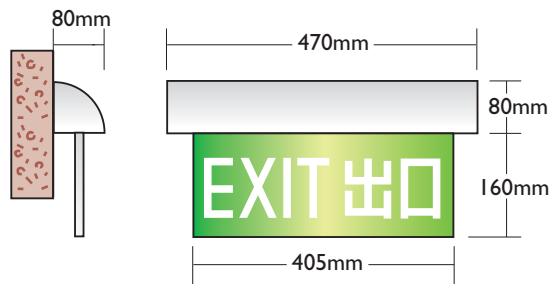

“CRYSTALITE” Cat. CX-LED-570-P-QL-H

Hairline stainless steel finishing

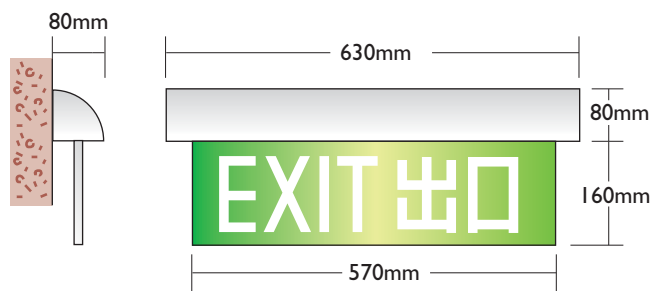

## Technical Data

Model	CX-LED-405-P-QL-H Hairline s/s finishing	CX-LED-570-P-QL-H Hairline s/s finishing
	CX-LED-405-P-QL-M Mirror s/s finishing	CX-LED-570-P-QL-M Mirror s/s finishing
	CX-LED-405-P-QL-G Golden plating finishing	CX-LED-570-P-QL-G Golden plating finishing
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 <sup>th</sup> Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM  
Content is subject to change without notice