

“LED PREMIER-HANGING-LITE” EXIT SIGN SERIES

Features


- Specially design for high headroom situation
- Plate suspended by an adjustable stainless steel wires
- Low D.C. Voltage Conducting on stainless steel wires
- Ceiling-mount
- Bottom access with spring lock opening
- Single-face or double-face application
- Minimum maintenance
- Lower power consumption
- c/w clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend


Exit Sign



Directional Sign



“CRYSTALITE” Cat. CX-LED-405-P-PHL-H
Hairline stainless steel finishing cover

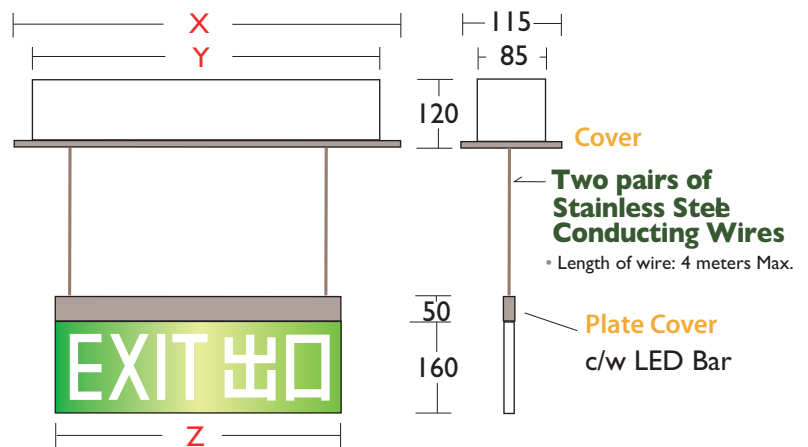

All dimensions are in mm

- One pairs of Strainless Steel Conducting wires for hanging
- One pairs of Strainless Steel Conducting wires for LED
LED: Low Voltage operation ~12V D.C.

Dimension	405-P	570-P
X	500mm	660mm
Y	470mm	630mm
Z	405mm	570mm

Technical Data

Model	CX-LED-405-P-PHL-H	CX-LED-405-P-PHL	CX-LED-570-P-PHL
Cover & Plate Cover	Hairline Stainless Steel finishing	GMS with white powder coating	GMS with white powder coating
Lamp	Super Bright LED Line		
Line Voltage	A/C 220V~240V 50Hz +6%-10%		
Discharge Duration	3 Hours		
Recharge Period	12 Hours		
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh		
Power Consumption	~3W		
Operating Temp	0°C - 50°C		
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign		