

“HALO-LITE” SERIES

Recess Ceiling-Mount Type
“Halo-Lite”系列

Feature

- Tungsten Halogen Lamps
- High efficiency
- Durable
- Slim & compact
- Wall-mount / false ceiling-mount
- GMS box with white powder coating
- Mirror laminated reflector
- Clear glass lens diffuser
- Maintenance free


Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision

Specification


Surface / Recessed mounted, self-contained, non-maintained type, emergency 2x6V 5W twin spot luminaire with automatic changeover device for 2or 3 hours emergency battery discharge. (Using Lead-Acid or Ni-cd/ Ni-mh rechargeable battery)

Lead Acid Battery Type

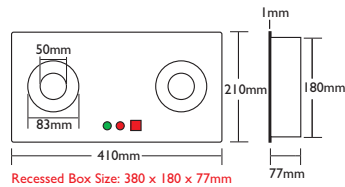


CE-5-HCS false ceiling-mount


Ni-cd/ Ni-mh Battery Type

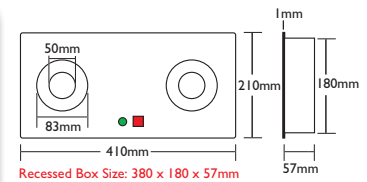

CE-5-HCN false ceiling-mount

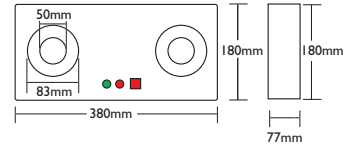

CE-5-HWS wall-mount

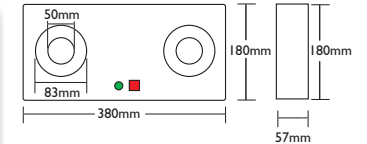

CE-5-HWN wall-mount

Technical Data

| Model | CE-5-HCS | CE-5-HWS | CE-5-HCN | CE-5-HWN |
|--------------------|---|------------|---|------------|
| System Mode | Non-Maintained Type | | | |
| Mounting | Ceiling-mount | Wall-mount | Ceiling-mount | Wall-mount |
| Emergency Output | 2x6V 5W Tungsten Halogen Lamps | | | |
| Battery | Sealed Lead-Acid battery 6V 12Ah | | Sealed Ni-cd / Ni-mh High Temperature Battery 6V 4.0Ah | |
| Discharge Duration | 3 hours | | 2 hours | |
| Recharge Period | 12 hours | | | |
| Line Voltage | A/C 220V~240V 50Hz +6%-10% | | | |
| Compliance | BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision) | | | |



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice