

“BI-LITE”

貓燈系列

Feature


- Tungsten Halogen Lamps
- Durable
- Wall-mount
- GMS lamp heads & box with white powder coating
- Clear glass lens diffuser
- Maintenance free

Standards


- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision



“CRYSTALITE” Cat. CE-12-21S

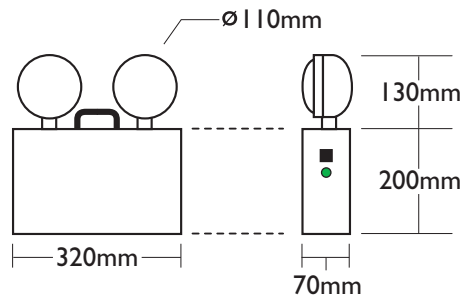

“CRYSTALITE” Cat. CE-8-18S
“CRYSTALITE” Cat. CE-5-10N

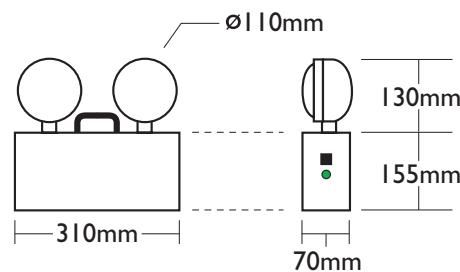

Specification

Surface mounted, self-contained, non-maintained type, emergency twin spot luminaire with automatic changeover device for minimum 2 or 3 hours emergency battery discharge.

Lamp-Type

- Lamp heads
- CE-12-21S: 20W
 - CE-8-18S: 2x8W
 - CE-5-10N: 2x5W

Technical Data

Model	CE-12-21S (大貓)	CE-8-18S (細貓)	CE-5-10N
System Mode	Non-Maintained Type		
Mounting	Wall-mount		
Emergency Output	2 x 12V 20W	2 x 6V 8W	2 x 6V 5W
Battery	Sealed Lead-Acid battery		Sealed Ni-cd / Ni-mh High Temperature Battery
	12V 12Ah	6V 12Ah	6V 4Ah
Discharge Duration	3 Hours	3 Hours	2 Hours
Recharge Period	12 hours		
Line Voltage	A/C 220V~240V 50Hz +6%-10%		
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)		



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice